


Finlux 2025(S), chassis 5000 without built-in sat. receiver.

The original EEPROM is SDA2586 and has been discontinued, but you can use 24C16 as replacement with the corresponding 24C16.HEX file.

The 24C16.HEX was specially modified bearing in mind differences in data addressing between SDAxx and 24Cxx chips.

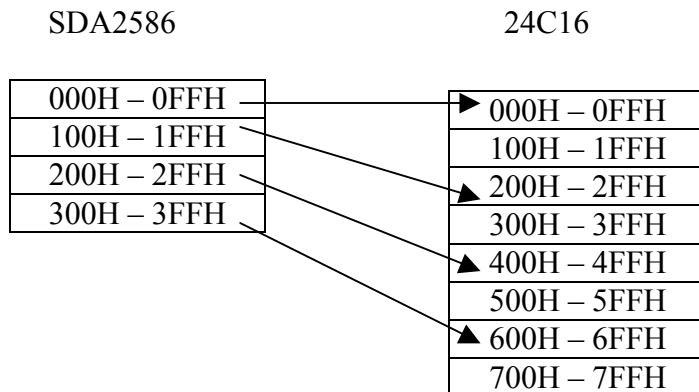

E.g. , if data is located at address 100H in SDA2586, it must be at 200H in 24C16.
The first 256 addresses from 0 to FF are the same for both ICs.

No hardware modifications are needed when replacing SDAxx with 24Cxx.